RECYCLED ROLLED RUBBER

STUDIO INTEGRITY

Designed to go hard

PERFORMANCE ENERGY FORCE FUNCTIONAL INTEGRITY

Constructed with a patented fusion technology to fuse top and base layer resulting in:

- Easy to maintain and sanitize
- Lower In-Room Impact Sound



Force Reduction ↓

11.4%

10.5mm

The amount of energy the surface absorbs

Energy Restitution ↑

72.2%

10.5mm

The amount of useful energy the surface returns

CONSTRUCTION

- 2.5mm Vulcanized Composition Rubber
- Fusion Bond
- Base Layer 8mm

SPECIFICATIONS

Thickness	10.5mm
Width	4ft
Length	25 ft
Colors	8
Warranty	10 Years

APPLICATIONS

- Performance Spaces
- Free-Weight Areas
- Functional Training Areas
- General Fitness Areas

508-816-2604 sales@spsurfacing.com

STUDIO INTEGRITY

COLORS / SPECS

COLORS




Onyx



Coffee



Pewter

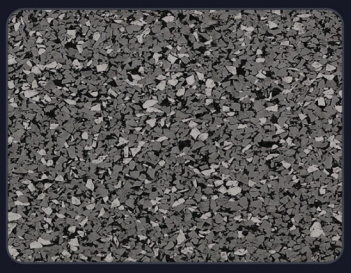


Basalt




Fieldstone



Stone

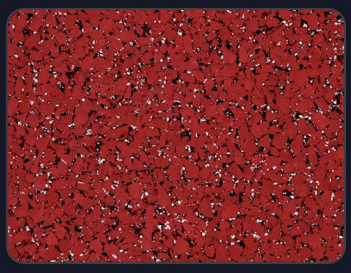

Cayenne

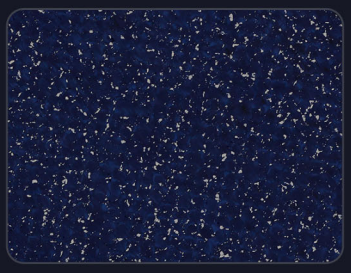

Harbor

PERFORMANCE CRITERIA

PERFORMANCE CRITERIA	TEST STANDARD	TYPICAL RESULTS
Recovery After Static Load	ASTM F970	0.004
Coefficient of Friction	ASTM D2047	>0.8
Abrasion Resistance	ASTM D3389	Pass
Flammability - Pill Test	ASTM D2859	Pass
Impact Insulation Class (IIC)	ASTM E492	55
Delta IIC	ASTM E2179	24

SPORT PRO
SURFACING

CONTACT US

508-816-2604

sales@spsurfacing.com