RECYCLED ROLLED RUBBER · DUAL LAYER

STUDIO SELECT

Versatile & Heavy Use

DUAL SELECT STRENGTH TRAINING

Force reduction where it counts plus sound and vibration control.

- Color Economy
- Zone-able Budgets



SPECIFICATIONS

Thicknesses	8mm (4+4), 10mm (6+4), 12mm (8+4)
Width	4ft
Length	25ft & 50ft
Color %	0, 10, 20, 95
Colors	8mm (6), 10mm (6), 12mm (6)
Warranty	3 Years

APPLICATIONS

- Strength Zones
- Functional Training
- General Free Weights

CONSTRUCTION

4mm color top layer

4mm, 6mm or 8mm base layer


508-816-2604 sales@spsurfacing.com

STUDIO SELECT DUAL LAYER COLORS / SPECS


8MM, 10MM, 12MM




Black




Blue
10% & 20%



Gray
10% & 20%



Blue & Gray
10% & 20%




Granite
95%



Sandstone
95%

CUSTOM COLOR CONCENTRATION OPTIONS

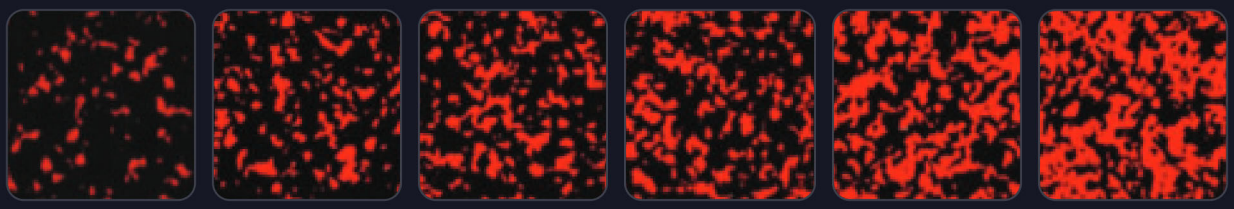

20% 30% 40% 50% 60% 70%

SPECS

SPECIFICATION	TEST METHOD	TYPICAL VALUE
Tensile Strength	ASTM D412	266 PSI
Density	ASTM D3676	65 lb / cubic foot
Tear Resistance	ASTM D413	Average Elongation at Break 1.55
Hardness	ASTM D2240	Shore A 65 +/- 5
Compression Set	ASTM D395	-4.90%
VOC Emissions	ASTM DS116	0.5 mg/m² or less
Flammability	ASTM D2859	PASS
Resistance to Chemicals	F-925-02	Resistance to most acids and chlorine
Coefficient of Friction	ASTM D1894/5	>0.8

SPORT PRO SURFACING

CONTACT US

508-816-2604 sales@spsurfacing.com